

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application No. :

U.S. National Serial No. :

Filed :

PCT International Application No. : PCT/FR2004/002157


VERIFICATION OF A TRANSLATION

I, the below named translator, hereby declare that:

My name and post office address are as stated below;

That I am knowledgeable in the French language in which the below identified international application was filed, and that, to the best of my knowledge and belief, the English translation of the international application No. PCT/FR2004/002157 is a true and complete translation of the above identified international application as filed.

I hereby declare that all the statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the patent application issued thereon.

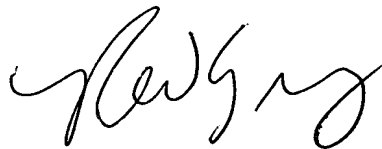

Date: February 8, 2006

Full name of the translator :

Roger Walter GRAY

For and on behalf of RWS Group Ltd

Post Office Address :

Europa House, Marsham Way,
Gerrards Cross, Buckinghamshire,
England.

WO 2005/022128

PCT/FR2004/002157

**Device and method for the noninvasive detection and
measurement of the properties of a medium**

5 The present invention relates to devices and methods
for a noninvasive detection and measurement of the
optical properties and electric fields of a medium.

10 More particularly, the invention relates to a device
for the noninvasive detection of the properties of a
medium by interferometry, this device comprising:

- an optical source for illuminating at least one
region of the medium to be probed, with a light beam
whose path defines an optical axis;
- 15 - means for measuring the variations in the phase
of the light beam during its passage through the region
to be probed, these measurement means
 - comprising an interferometer for splitting
the light beam into a reference beam and a probe beam,
 - 20 in this interferometer the servocontrol of the
respective path lengths of the reference beam and of
the probe beam being active up to a cutoff frequency f_c
and
 - having a signal sampling frequency f_a .

25 Document US-A-5 394 098 describes an example of such a
device used for testing optoelectronic components,
using an optical source consisting of a laser. More
precisely, electric fields are measured in the
30 optoelectronic components by means of a layer of
material constituting an optically active medium
covering at least part of the component that it is
desired to test.

35 In the present document, the expression "optically
active medium" is understood to mean a medium having
electrooptic properties and more particularly a medium
having a linear electrooptic effect (also called the

Pockels effect), or a quadratic electrooptic effect, the manifestation threshold of which is however higher than in the linear case, while still remaining compatible with the use of short-pulse power lasers.

5

This type of device does however have the drawback of allowing measurements only at a signal sampling frequency f_a above the cutoff frequency f_c . This type of device cannot be used in particular for detection of
10 electric fields within the volume of biological media, since the variations in refractive index that are due to electric fields in biological systems essentially take place at frequencies below 1 kHz, whereas the frequency f_c must be a few kHz in order to eliminate
15 external (thermal, mechanical, acoustic, etc.) noise.

It is an object of the present invention in particular to alleviate this drawback.

20 For this purpose, the invention provides a device for the noninvasive detection of the properties of a medium by interferometry, which device, apart from the features already mentioned, is characterized in that it includes scanning means suitable for scanning, with the
25 probe beam, the region to be probed and a reference region with an image acquisition frequency f for the images recorded by the means for measuring the variations in the phase of the light beam above the cutoff frequency f_c .

30

Thus, a modulation of the frequency of variation of the signal corresponding to the observed electrooptic phenomenon is obtained at a higher frequency f and advantageously a frequency higher than the cutoff
35 frequency f_c for the (low-pass) servocontrol of the respective path lengths of the reference beam and the probe beam.

We also note that the reference region may have a minimum size of a pixel.

In the embodiments of the invention, there may
5 optionally also be one or other of the following arrangements:

- the scanning means scan the region to be probed and the reference region along a first direction in space at a frequency f_x and along a second direction in
10 space at a frequency f_y , in order to form an image of n pixels along the first direction and m pixels along the second direction, the frequencies f_x and f_y being chosen such that $f_x = f_y/n$ and $f_y = f_a/m$, f_x and f_y being greater than f_c ; in fact, these first and second
15 directions in space are perpendicular to the optical axis;

- the means for measuring the variations in the phase of the light beam comprise a confocal microscope in which the region to be probed is placed in a manner
20 suitable for forming an image of a plane of the region to be probed. Thus, thanks to the confocal microscope, a three-dimensional spatial resolution may be obtained. It is then possible to probe the volume of the medium. This arrangement allows a medium to be probed without
25 particular preparation if the medium is endowed with electrooptic properties. The spatial resolution of the electric field measurement is limited only by the optics used;

- it includes means for moving the medium, along
30 the three directions in space, in the probe beam;

- the scanning means comprise four acoustooptic deflectors, two for deflecting the light beam, upstream of the confocal microscope, each in one of the first and second directions in space respectively, and two
35 for rectifying the light beam, each in one of the first and second directions in space respectively, downstream of the confocal microscope;

- at least one acoustooptic deflector, downstream of the confocal microscope is set so as to make the

0th-order of the light beam inclined to the optical axis and to retain the paraxial 1st-order. Thus, the 0th-order of the beam leaves the optical axis and one of the 1st-orders of the beam, output by the first
5 deflectors, has a mean position on the optical axis. If the intensity of the 0th-order of the beam is nonzero, the corresponding part of the beam leaves the optical axis and reaches neither the region to be probed nor the beam photodetection means. Optionally, a Galileo
10 telescope allows the angle between the 1st-order and the optical axis to be increased; and

- it includes, upstream of the confocal microscope, means for controlling the polarization of the probe beam incident on the region to be probed.

15

Many other types of scanning other than that mentioned above may be envisioned. Just a few of them may be mentioned:

· rectangular scanning: the scanning is carried out
20 over a region of interest, comprising the region to be probed and the reference region, which is smaller than the area effectively accessible. This type of scanning is in particular useful if the region to be probed is small - this may then be profitably used for scanning
25 at a higher frequency with the same resolution, or for increasing the resolution by constricting the pixels or any intermediate solution;

· multi-rectangle scanning: the scanning is carried out over a region corresponding to a set of rectangles,
30 such as those described in the previous paragraph. The reference region may be a single region, whereas the various regions to be probed correspond to different rectangles. This may be useful if the region to be probed cannot be covered by a single rectangle;

35 · scanning over areas of various shapes: the scanning is carried out over areas that are circular, elliptical, triangular, etc. or over a composition of these areas;

· scanning over complex surfaces: the scanning is carried out over surfaces with complex shapes, as the application requires, for example for studying all or part of an optoelectronic component or of a biological system (neuron, membrane, artificial membrane, for example of the Langmuir-Blodgett film type, etc.); and

· parameterized scanning: the scanning is carried out along paths with the coordinates x and y parameterized as follows:

$$\begin{aligned}x &= \cos(w.n.t) \\ y &= \cos(w.n.m.t)\end{aligned}$$

in which n and m are substantially the numbers of pixels corresponding to an acquisition period along the x and y coordinates respectively. This type of scanning makes it possible to approach the limits of the acoustooptic modulators as closely as possible. Of course, it is also possible to keep this parameterization only on one of the two coordinates.

It should be noted that the construction of the system for controlling these various types of scanning are known to those skilled in the art.

According to another aspect, the invention relates to a method of using the device according to the invention. In particular, this is a method of noninvasively detecting the properties of a medium by interferometry, in which:

- at least one region of the medium to be probed is illuminated with an optical source that generates a light beam, the path of which defines an optical axis;

- an interferometer is used to split the light beam into a reference beam and a probe beam and to measure the phase shift between the reference beam and the probe beam after the latter has passed through the region to be probed;

- the respective path lengths of the reference beam and the probe beam are servocontrolled by photodetection means; and

- images corresponding to the measurement of the phase shift at various points in the region to be probed are acquired, with the photodetection means, at a signal sampling frequency f_a above the cutoff frequency f_c for servocontrolling the respective path lengths of the reference beam and the probe beam, characterized in that the region to be probed and a reference region are scanned with the probe beam at an image acquisition frequency f for images recorded by the means for measuring the variations in the phase of the light beam above the cutoff frequency f_c .

In some of the ways of implementing the method according to the invention, optionally one or more of the following arrangements may furthermore be used:

- the region to be probed and the reference region are scanned along a first direction in space at a frequency f_x and along a second direction in space at a frequency f_y , in order to form an image of n pixels along the first direction and m pixels along the second direction, the frequencies f_x and f_y being chosen such that $f_x = f_y/n$ and $f_y = f_a/m$, f_x and f_y being greater than f_c ;

- the medium is excited at a frequency f_e and the variation in the phase of the probe beam relative to that of the reference beam is measured at this same frequency f_e ;

- knowing the distribution of the electrooptic properties of the medium, a mapping of the electric field in the medium is carried out;

- an electric field of known configuration is generated in the medium so as to reveal electrooptic properties of the medium; and

- the medium is doped with molecules or ions etc. having electrooptic properties, or conferring electrooptic properties on the medium, so as to accentuate the electrooptic properties of the medium, if the latter is already endowed therewith, or to

reveal the presence of electric fields in a medium that does not possess such properties intrinsically.

5 The nature of the probed media may, thanks to the invention, be highly varied. Apart from the optoelectronic components already mentioned, there may be a local distribution, for example an interface between two different dielectric media each devoid of any intrinsic electrooptic activity. The interface
10 between the two media having individually nonelectrooptic character therefore induces a structural break in centrosymmetry near the discontinuity and the possibility of an electrooptic effect. In another example of a local distribution of
15 the electrooptic properties, the medium is amorphous. For example, it may be a polymer matrix containing a solid solution of randomly dispersed electrooptic molecules that have been locally oriented in a noncentrosymmetric random order, (owing to the effect
20 of an electric field locally induced by a suitable electrode or by optical fields in a configuration called an all-optical orientation, which acts locally at the focus of the orienting beams). Such local occurrences of electrooptic properties may be denoted
25 by either of the following suggestive names: "electrooptic surfaces" (in the case of two-dimensional or quasi-two-dimensional distribution of the membrane type) or "electrooptic islands" (or voxels) in the case of inclusions of electrooptic structures exogenic to
30 the ambient medium. For example, in this case there may be inclusions of electrooptic structures in a film of amorphous polymer devoid of intrinsic electrooptic properties (these inclusions having nanoscale or
35 microscale dimensions, for example nanocrystals having quadratic nonlinear properties). Conversely, it is possible to create, by axial disorientation, a local defect having an electrooptic effect within an initially homogeneous electrooptic structure (as obtained by quasi-uniform orientation in an electric

field in a conventional configuration of the corona
needle type). In particular, the invention is useful in
two symmetrical situations. Firstly, it makes it
possible, when the distribution of the electrooptic
5 properties is unknown, to reveal the spatial mapping of
this *a priori* unknown distribution by applying an
electric field with a set of simple electrodes that
allows the distribution of the field within the
specimen to be controlled as well as possible.
10 Secondly, when the spatial distribution of the
electrooptic properties is well known by other means
(for example in the case of a technological method for
the controlled formation of this distribution), the
invention makes it possible to determine the mapping of
15 the internal or external field within the distribution,
the latter depending both on this *a priori* known
distribution of the electrooptic properties, but also
on the geometry of the electrodes via which an external
electric field is applied. In certain intermediate
20 cases, knowledge about both the distribution of the
electric field and the electrooptic properties of the
structures proves to be limited. The invention then
makes it possible for the optical phase shift
experienced by the incident wave probing the medium to
25 be mapped with certainty, despite these two unknowns.
To make progress in resolving the indeterminacies, a
person skilled in the art will therefore propose
structural and/or physical hypotheses with respect to
either the structure of the electrooptic medium, or the
30 field distribution, or a combination of the two.

Other aspects, objects and advantages of the invention
will become apparent on reading the description of one
of its embodiments.

35

The invention will also be more clearly understood from
the drawings in which:

- figure 1 is a diagram showing the principle of one example of an embodiment of a device according to the present invention;

5 - figure 2 shows schematically the scanning means of the device of figure 1;

- figure 3 shows schematically the scanning carried out by the scanning means of figure 2;

- figure 4 shows schematically a variant of part of the device of figures 1 to 3; and

10 - figures 5a to 5f show schematically a few examples of applications of the method according to the invention.

15 In the various figures, the same references denote identical or similar elements.

One example of an embodiment of the device according to the invention is presented below in relation to figures 1 to 5.

20

In this example, the device according to the invention is a device for the quantitative and noninvasive detection and mapping of an electric field or potential or else of their spatial and/or temporal derivatives in an optically active, and possibly structurally known, medium.

25

As shown in figure 1, this device 1 is a microscope. It comprises an optical source 3 and an interferometer 5 consisting of means 7 for mapping the phase shift of a light beam. It thus allows the variations in the refractive index to be measured.

30

The optical source 3 is for example a laser. The wavelength, the power and the nature (pulsed or continuous) of this laser are, of course, tailored to the medium to be probed and more particularly to the optically active species (molecules, ions, electronic material, etc.) that reveals the electric field within

35

this medium. For example, for an application involving the study of optoelectronic components, an He/Ne laser emitting at 632.8 nm with a power of a few milliwatts may be required for use.

5

The interferometer 5 comprises splitter means 9, for example means consisting of a half-wave plate and a polarizer, servocontrolled mirrors 11, a specimen holder 13, a confocal microscope 15 and optical
10 elements 17. According to the embodiment example of the microscope shown in figure 1, the electric fields are detected in transmission mode. Of course, it is also within the competence of a person skilled in the art to transpose this teaching in order to carry out this
15 detection in reflection mode.

The interferometer 5 is mounted in homodyne detection mode. The splitter means 9 split the light beam 19 emitted by the source 3 into a reference beam 21 and a
20 probe beam 23. The quadrature between the reference beam 21 and the probe beam 23 is slaved to $\pi/2$ so as to determine the relative variation in optical path. An example of the servocontrol of the mirrors 11 is given in the doctoral thesis by P.F. Cohadon (Laboratoire
25 Kastler-Brossel, Paris University VI, January 2000).

The probe beam 23 is focused in a region of a specimen
25 mounted in the specimen holder 13 by means of a first optic 27 of the confocal microscope 15. A second
30 optic 28 of the confocal microscope 15 collects the light beam transmitted by the specimen 25 in this region. It should be noted that, in the case of detection in reflection mode, the reflection may optionally take place after the second optic 28. The
35 light beam is then filtered by the optical elements 17 comprising a diaphragm that intercepts the entire signal that does not pass through the focus of the second optic 28.

The specimen 25 is moved in the probe beam 23 by a piezoelectric block that moves the specimen holder 13 in the three directions in space. The specimen 25 is thus probed volumewise. Thanks to the piezoelectric
5 block, it is possible for the electric fields in the specimen 25 to be mapped in three dimensions.

The probe beam 23 is detected and recorded by means 7 for mapping the phase shift of the light beam. More
10 precisely, these means comprise detectors 29 and an electronic processing and servocontrol unit 31.

The detectors 29 are ultrafast high-sensitivity photodiodes such as those described in the
15 aforementioned doctoral thesis of P.F. Cohadon. These detectors 29 are used both for servocontrolling the relative optical path lengths of the reference beam 21 and the probe beam 23 and for recording the signal transmitted by the specimen 25.

20

The electronic processing and servocontrol unit 31 is a high-frequency electronic unit known to those skilled in the art.

25 The device 1 further includes means 33 for scanning the probe beam 23 over the specimen 25.

These scanning means 33 are illustrated in greater detail in figure 2. Many embodiments of the scanning
30 means 33 may of course be envisaged by those skilled in the art. Here, only one embodiment is shown. According to this embodiment, the scanning means 33 comprise four acoustooptic deflectors 35.

35 Two of these deflectors 35 are placed upstream of the confocal microscope 15 in order to deflect the probe beam 23. These deflectors 35 upstream of the confocal microscope are inclined so as to retain only the 1st-order of the beam parallel to the optical axis. One

of these two deflectors causes the specimen 25 to be scanned with the probe beam 23 along a first direction in space, at a frequency f_x , which is also the acquisition frequency. The other of these two
5 deflectors causes the specimen 25 to be scanned with the probe beam 23 along a second direction in space, at a frequency f_y (see figure 3). An image consisting of n pixels along the first direction and m pixels along the second direction is thus formed. If the signal sampling
10 frequency is f_a , the frequencies f_x and f_y are chosen such that $f_x = f_y/n$ and $f_y = f_a/m$, and such that both these are above the cutoff frequency f_c .

The other two of the four deflectors 35 are placed
15 downstream of the confocal microscope 15 and allow the probe beam 23 to be rectified, each in one of the first and second directions in space respectively.

The scanning means 33 make it possible to modulate, at
20 the frequency f_x above the cutoff frequency f_c , the signal coming from the possible electric fields detected.

As illustrated in figure 3, the signal transmitted by
25 the specimen 25 during the scan along the first and second directions is recorded. This scan passes via a region 34 to be probed and a reference region 36. This reference region 36 may be a region of the specimen 25 itself in which the electric fields do not vary. A
30 reference image, that is to say an image of the phase with no potential or with a reference or rest potential, is then subtracted from the image of the signal coming from the possible electric fields detected. The image of this signal coming from the
35 possible detected variations of the electric fields is thus displayed on a black background. The detection is therefore a synchronous detection.

The signal coming from the possible electric field detected is demodulated in the electronic processing and servocontrol unit 31 in a conventional manner.

5 In another variant of the device according to the invention, shown in figure 4, which may be combined with the embodiment already explained, this includes means 37 for controlling the polarization of the probe beam 23. These polarization control means 37 allow the
10 polarization state of the probe beam 23 incident on the specimen 25 to be varied in a controlled manner. For example, these are polarization control means 37 suitable for obtaining a linear polarization of the probe beam 23, the polarization angle ρ of which in the
15 plane transverse to the propagation axis can be varied over 360° . Such polarization control means 37 may be formed by any device known to those skilled in the art for the preparation and rotation of a linear polarization state in the plane transverse to the
20 optical axis. In particular, they may comprise a half-wave plate and/or a polarizer.

Such polarization control means 37 are placed upstream of the first optic 27. A person skilled in the art is
25 then capable of carrying out the corrective calculations needed to switch the linear polarization state upstream of this first optic 27 to the elliptic polarization state in the specimen 25. An optional polarization analyzer 39 may be placed on the
30 downstream side of the second optic 28, as a complement to the polarization control means 37.

The device according to the invention may be used to detect electric fields whose variations occur at a
35 frequency below the cutoff frequency f_c for servocontrolling the relative path length of the reference beam 21 and the probe beam 23. Thus, it may be used for detecting periodic or aperiodic signals

that may or may not be transient and may or may not be reproducible.

5 The device described above may be used in many applications.

As an example, this device may be used in a method according to the invention for testing optoelectronic components.

10

In the present document, the term "optoelectronic component" is understood to mean an electronic, microelectronic or optronic component, or else a circuit comprising components of at least one of these types. Advantageously, these optoelectronic components exhibit an electrooptic effect, at least in part of the region to be studied and/or mapped.

20 More particularly, in this type of method, a reproducible periodic excitation potential is created between two electrodes. The region to be probed includes at least one part of an optoelectronic component to which this potential is applied.

25 This type of method may be used for studying segmented media (see figure 5a). It therefore allows optoelectronic component fabrication processes to be characterized and validated on the micron and/or submicron scales. For example, it is thus possible to measure the resolution of optically active etched regions.

35 This type of method may also be used for studying electric field gradients, especially by the use of electrodes of nontrivial shape (figure 5b). These are for example multipolar electrodes (cf. octupolar geometry as described in the article by J. Zyss, Nonlinear Optics, Vol. 1, page 3, 1991; see also figure 5c) via which an electric potential is applied.

An electrooptic structure of multipolar symmetry matched to that of the electrodes allows the derivatives of the field to be revealed, for example the second derivative of the field at the center of a set of octupolar electrodes, as depicted in figure 5c, the field and its first derivative being made zero by the symmetry at the center of the orientation microcell shown diagrammatically therein. It is thus possible, thanks to the method according to the invention, to map electric field gradients or curvatures in optically active regions. These field maps may be compared with calculations for the validation and refining of models or, on the contrary, they make it possible to search for field configurations whose particular properties cannot be easily calculated.

This type of method may also be used for studying multipolar fields (see figure 5c). In this case, the potential is applied via at least one electrode with multipolar symmetry. Configurations of electrodes with multipolar symmetry allow multipolar field structures to be examined. Such multipolar field structures make it possible, for example, to understand the orientational distribution of molecules under the influence of these multipolar fields.

In another application of the method according to the invention, the propagation of pulses in a conductor (a wire, integrated circuit, optoelectronic component, etc.) may be studied. This conductor is then placed in an optically active medium. By exposing the medium to ultrashort pulses, it is possible to examine, by frequency analysis of the propagation of these pulses in the conductor, ultrashort transient regimes and information about the ohmic resistance of the conductor (see figure 5d).

Another application of the method according to the invention is in the study of phenomena such as field

transfer, spatial overlap, etc. In optoelectronic components, the field applied between electrodes does not always have a simple form (see figure 5e). In particular, field transfer and spatial overlap problems
5 may occur, both in the static case (poling of the active layer of the component) and in the dynamic case (modulation field). By mapping the electric fields using the method according to the invention, it is possible to optimize the shape and structure of these
10 components, for example so as to result in reduction in the control voltage.

Another application of the method according to the invention is in the study of fractal aggregates,
15 particularly percolation in these aggregates. In the region 34 to be probed there may be at least part of a fractal aggregate (see figure 5f).

There are also particularly useful applications of the device and the method according to the invention in the
20 field of biology. In this case, the region 34 to be probed includes at least one part of a natural or artificial biological medium. For example, the region 34 to be probed includes at least one part of a natural
25 or artificial biological membrane.

Thus, one application of the method according to the invention is the study of biomimetic systems, for example the diffusion of molecular species through
30 artificial membranes. Modifications of these membranes, due to phenomena of various types (chemical, biochemical, electrical, electromagnetic radiation, etc.), may be detected thanks to the device according to the invention. This type of application may extend
35 to the study of microfluidic systems, capsules, vesicles, etc.

The method according to the invention may also be used to study biological systems, such as neurons, animal or plant cells, etc.

5 For the purpose of studying healthy neurons, the region
34 to be probed includes at least one part of a neuron
or of a neural network and the device according to the
invention allows the propagation of neural and/or
interneuronal electrical signals, the origin of these
10 signals, etc. to be determined. The device according to
the invention in this case advantageously replaces the
"patch-clamp" technique for which, for example for a
field of observation measuring $10 \times 10 \mu\text{m}^2$, several tens
of thousands of electrodes, or more, would have been
15 necessary in order to obtain an equivalent mapping. The
device according to the invention also overcomes
contact problems, stearic hindrance problems, etc.

The device according to the invention also can be used
20 to study disturbed or pathological neurons, sclerosed
neurons, degenerated neurons, etc.

Thanks to the device according to the invention, it is
also possible to observe small-scale electrical
25 phenomena, such as overvoltage phenomena or those
occurring in oxidation-reduction chemical reactions, in
chemical reactors possibly on a nanoscale, in micelles,
in humic-clay complexes, etc. The region 34 to be
probed therefore constitutes at least one part of a
30 chemical medium.

In certain cases, whether in electronics or in biology,
the medium must be doped with electrooptic molecules or
ions so as to accentuate the electrooptic properties of
35 the medium and/or to allow electric fields to be
observed in media that do not have such properties.

As an example of electrooptic molecules, the following
molecules may be mentioned:

- the molecule "DR1" (Dispersed Red 1) is well known to those skilled in the art. It is used more for studying optoelectronic components and biomimetic systems;

5 - the molecule "Crystal Violet" is also well known to those skilled in the art. It constitutes an example of an octupole. It is sensitive to successive gradients of the electric field and not to the electric field itself. The method according to the present invention
10 is not limited to detecting electric fields with 2nd-order nonlinearities since higher-order nonlinearities may be used; and

 - molecules derived from phthalocyanine by peripheral substitution with electron donor and
15 acceptor groups in a noncentrosymmetric geometry are also known to those skilled in the art. They can be used for studying biological systems.

Many other molecules may be used. In particular,
20 molecules having different shapes from those indicated above or derivatives of these molecules may be used.